

Visit us at:
www.artplastics.com.au

14 White Street
Bayswater WA 6053



Smell Stopper Instruction Sheet



Reg. Design Application

Four Easy Steps:

1. Remove the floor grate from it's housing in the floor.
2. Position the soft rubber top sealing ring of the Smell Stopper onto the floor grate.
3. Use the included flat head screw to attach the Smell Stopper assembly to the underside of the floor grate. Check to see that the design of the floor grate matches the rubber seal of the Smell Stopper assembly so that foul air does not by-pass the assembly! (See Diagram). Do not over tighten flat head screw.
4. Replace the floor grate and attached Smell Stopper assembly into the grate housing in the floor.
5. Enjoy an odourless bathroom! (Four easy steps because we didn't count this one!)

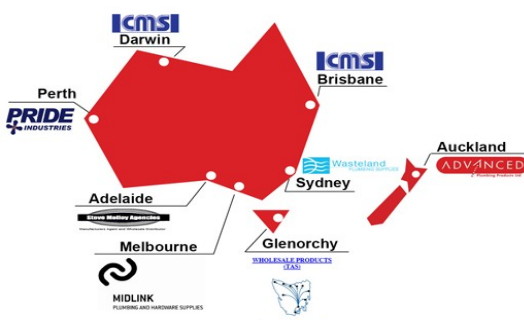

Western Australia
Pride Industries:
Ph: 08 9272 6511
Fax: 08 9272 3427

Victoria
Midlink Plumbing Supplies:
Ph: 03 9879 4080
Fax: 03 9879 4048

Queensland & NT
Collis Marketing Services:
Ph: 07 3805 6664
Fax: 07 3805 6668

New South Wales
Wasteland Plumbing Supplies:
Ph: 02 9674 7680
Fax: 02 9674 7681

Tasmania
Wholesale Products:
Ph: 03 6273 3455
Fax: 03 6273 1901

South Australia
Steve Molloy Agencies:
Ph: 08 8352 8600
Fax: 08 8352 8622